


Touch Your World-

http://www.sunwaytech.com.hk

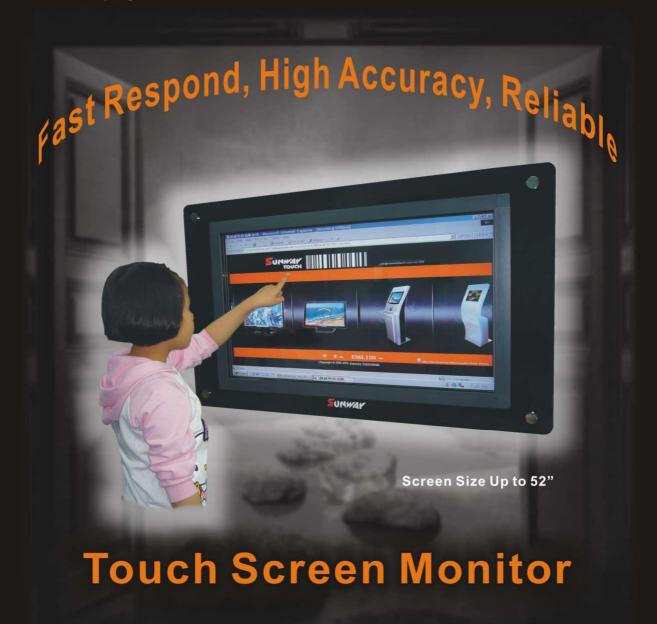

Sunway Touch Screen Monitors appeal to a broad range of retail, restaurants, business, hospital and industry customers seeking a reliable, fast respond, highly accuracy touch screen to help reduce transaction times & simply PC systems interface.

Sunway Technology Company

Hong Kong Office: Shop 250&260, 2/F., New Capital Computer Plaza,85-95 Un Chau St., Sham Shui Po, Kowloon, Hong Kong
Tel: +852 2720 6007
Fax: +852 2650 5007

Web Site: www.sunwaytech.com.hk

Inquiry: info@sunwaytech.com.hk

Hot Line: +852 8200 2867

Specification and Details may change without Notice. Photos are for Referrence



Touch your world with Sunway Touch Monitor



SW-45 Series

Open Frame Touch Screen Monitor



- Screen Size: 6.4" ~ 52"
 Touch Screen: 4, 5, 8 Wires
 Resistive, SAW, IRDA available
 Resolution: 640 x 480 ~ 1366 x 768
 Frame: Steel with Powder Coated
 with VESA mounting
 Output: VGA, DVI, TV, AV Available
 Flexible, Reliable, Heavy Duty
 Easy for installation

SW-55 Series

Big size Touch Screen Monitor



- Screen Size: 22" ~ 52"
 Touch Screen: IRDA Type
 Resolution: Up to 1366 x 768
 Cabinet: Acrylic Front Panel with Steel Back Casing
 Options: DVI, TV, AV, HDMI ...
- Available for OEM Logo and your

SW-19035

Metal Case Touch Screen Monitor



- Resolution: 1280 x 1024
 Brightness: 300 cd/m²
 Contrast Rate: 500:1
 Color: 16.7M
 Touch Screen: 5 Wires Resistive (Options: 4, 8 Wires, SAW)
 Interface: VGA, DVI-D, USB
 Size: 440 x 380 x 65/89 mm HxWxD
 Options: A/V, TV, RS-232, Card Reader

SW-15035

Metal Case Touch Screen Monitor



- Resolution: 1024 x 768
 Brightness: 250 cd/m²
 Contrast Rate: 450:1
 Color: 16.7M
 Touch Screen: 4 Wires Resistive
 (Options: 5, 8 Wires, SAW)
 Interface: VGA, USB
 Size: 360 x 305 x 56/80 mm HxWxD
 Options: AIV, DVI, TV, RS-232,
 Card Reader Card Reader

SW-12135 12.1" Metal Case Touch Screen Monitor



- Resolution: 1024 x 768
 Brightness: 200cd/m²
 Contrast Rate: 300:1
 Color: 262K
 Touch Screen: 4 Wires Resistive
 (Options: 5, 8 Wires, SAW)
 Interface: VGA, USB
 Size: 300 x 240 x 46/70 mm HxWxD
 Options: A/V, Card Reader, RS-232

Features:

- · High Accurate and Fast Touch Respond
- High Accurate and Fast Touch Respond
 Work Stable in the Harsh Environment, Easy to Maintain
 Effectively Protect Touch Screen from Being Corroded by Water, Oil, Dusty and Static
 Compatible to Most of OS, Controller Certified By Microsoft


SW-17008

Touch Screen Desktop Monitor

- Resolution: 1280 x1024
 Brightness: 300 cd/m²
 Contrast Rate: 500:1
 Color: 16.7M
 Touch Screen: 4 Wires Resistive
 Interface: VGA, DVI-D, Built-In
 Speakers, Audio In, USB
 Size: 385 x 315 x 56/96 mm HxWxD
 Screen Adjustable Wall Mounting
 Stand, RS-232 Available

15" SW-15008


Touch Screen Desktop Monitor



- Resolution: 1024 x 768
 Brightness: 250 cd/m²
 Contrast Rate: 450:1
 Color: 16.7M
 Touch Screen: 4 Wires Resistive
 Interface: VGA, USB
 Size: 340 x 265 x 35/72 mm HxWxD
 Screen Adjustable Wall Mounting
 Stand, RS-232 Available

SW-10402 10.4"

Touch Screen Desktop Monitor



- · Resolution: 800 x 600

- Resolution: 800 x 600
 Brightness: 230 cd/m²
 Contrast Rate: 300:1
 Color: 262K
 Touch Screen: 4 Wires Resistive
 Interface: VGA, USB
 Compact, Flexible. Reliable
 Options: TV, RS-232
 Size: 270 x 215 x 43/87 mm HxWxD

8.0" SW-08779

Touch Screen Desktop Monitor



- Resolution: Best in 800 x 600
- Brightness: 380 cd/m³
 Contrast Rate: 250:1
- Color: 262K
 Color: 262K
 Touch Screen: 4 Wires Resistive
 Interface: VGA, USB, Built-In Mono
 Options: TV, RS-232
 Size: 205 x 165 x 28 mm HxWxD

Specification:

Type: 4 Wires Resistive Respond Time: <5 ms Resolution: 4096 x 4096 Transparency: > 85% Surface Hardness: 4H

Interface: USB, RS-232 or PS/2 Operating Life: 35,000,000 Times Operating Force: 10 ~100 g Mechanical: ITO film to Glass OS Support: Windows, Linux, iMac, DOS

The Expert of Touch Solution